



Improvements (changes) of Switch Assem

EXISTING




Fuse 250V 10A (Use 1/10,1/5HP)
Fuse 250V 16A (Use 1/4,1/3HP)

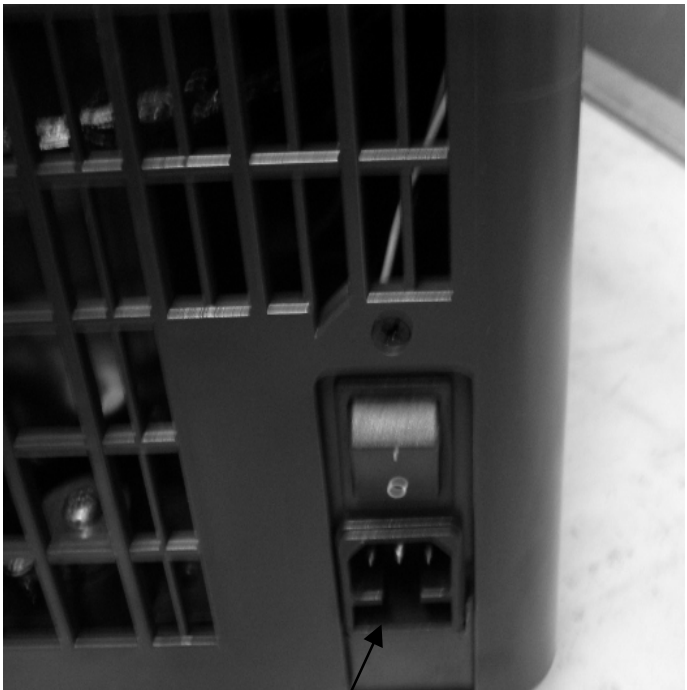


bly

IMPROVEMENT



Fuse 250V 10A (Use 1/10,1/5HP)
Fuse 250V 15A (Use 1/4,1/3HP)

recommendati
on




How to Change the Chiller Switch Assembly

STEP 1



STEP 2

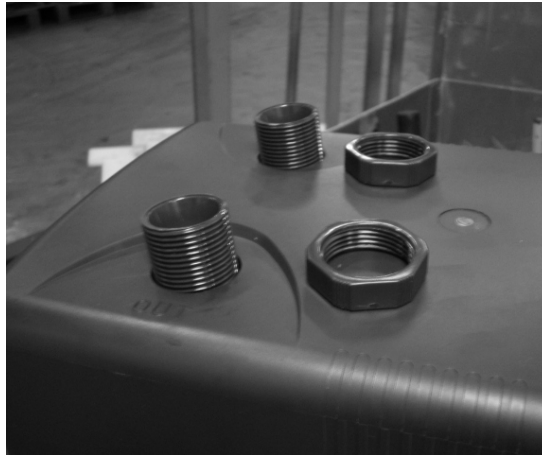

STEP 3



STEP 4



STEP 5



STEP 6



STEP 7




STEP 8



STEP 9




STEP 10

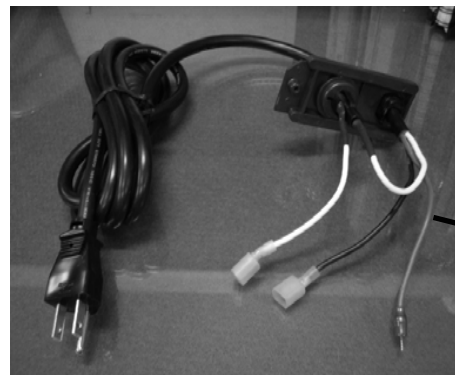

STEP 11




STEP 12

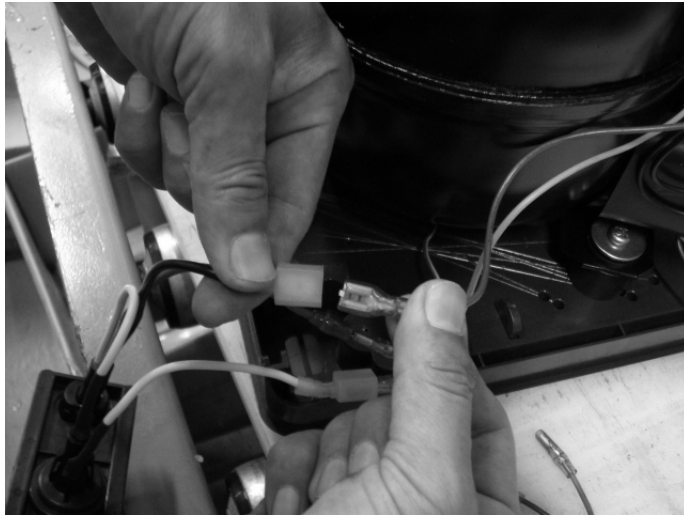


Connection of cable

NEW Cable bracket	Chiller
White color	↔ Sky blue color
Black color	↔ Brown color
Green color (earth)	↔ Green color (earth)


STEP 13

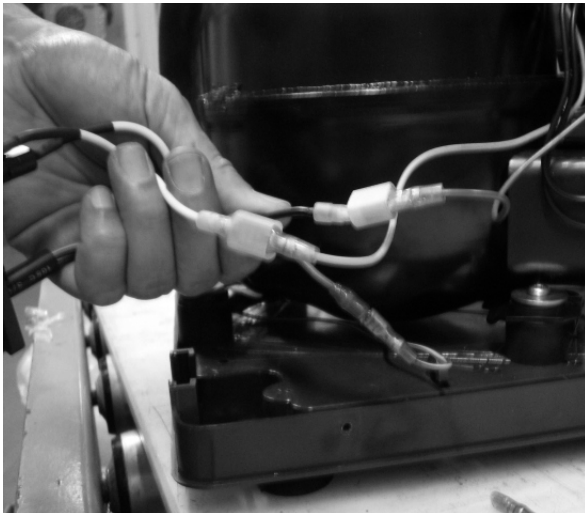

STEP 14

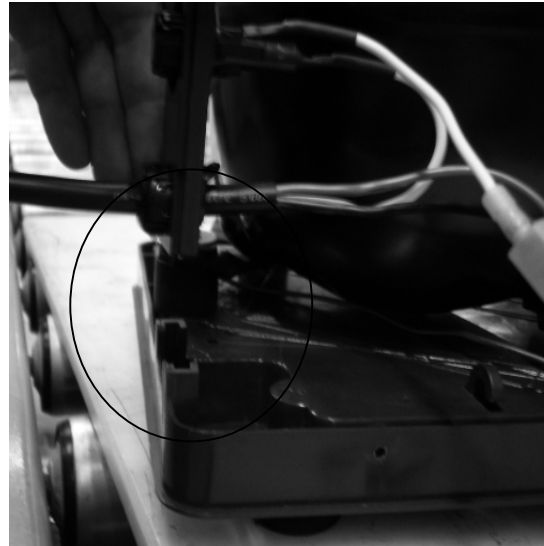


STEP 15

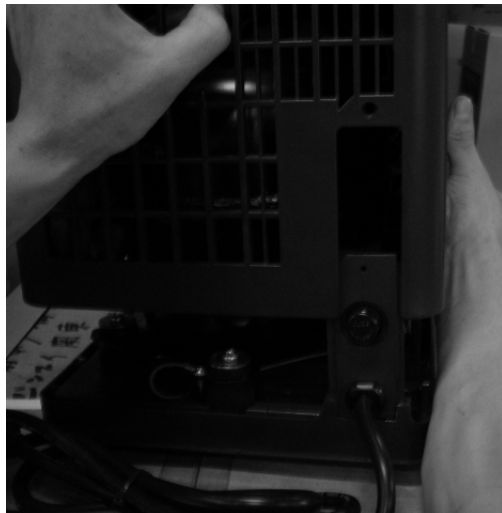

STEP 16



STEP 17

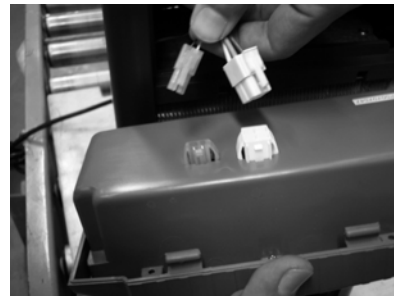

STEP 18



STEP 19



STEP 20 complete

